

Dimensions of assembled package:
25' 0" wide x 25' 3" deep x 11' 6" tall



The components of this gym can be combined with others to create different play sets. This is the best order of assembly to create this specific set.


Read this sheet and all instructions included with the different parts before assembly.


See the Instructions and Owner's Manual included in carton 63006-445 for important safety information.

Cartons for this Play Set:

2	63006-421	Williamsburg Box 1 (Hardware)
2	63006-422	Williamsburg Box 2
2	63006-423	Williamsburg Box 3
2	63006-445	Williamsburg Roof (Hdwre & Instr)
2	SH946-102	Access Ladder, 5ft
1	63058-202	4 Position Swing Beam
1	63060-222	9ft Swing Beam Legs (Hdwre & Instr)
1	50546-777	3 Swings, 1 Trapeze
2	15166-400	10 ft. Super Wave Slide
1	AH201-102Q	Rock Climbing Wall (Hdwre & Instr)
1	63079-102	Monkey Bars (Hdwre & Instr)
1	SD920-800Q	Wmsburg Picnic Table (Hdwre & Instr)
1	SC907-800Q	Wmsburg Play Walls (Hdwre & Instr)
2	SC908-800Q	Wmsburg Play Floor (Hdwre & Instr)
2	AG942-400	Acc. Ladder Handles (Hdwre & Instr)
2	AG943-400	Slide Handle (Hdwre & Instr)
2	SM964-402	Gable Fans (Hdwre & Instr)
2	SM963-402	Dormer (Hdwre & Instr)
1	AA917-603	Firemans Pole (Hdwre & Instr)
1	SJ951-102	Bridge (Hdwre & Instr)

- Start by assembling the Williamsburg tower on the right. Instructions and hardware are in the cartons noted above. Please note: The swing beam extends from the end of the tower, 90° from the position shown in the beam assembly instructions.
- Wait to install the Access Ladder, Slide, and Wall Slats until after the whole play set is complete.
- Wmsburg step 13. Before installing the roof, find the post where the swing beam will mount. Drill 7/16" diameter holes through the post at 3", 7-1/4" and 15-1/2" below the top of the post as shown at right. The beam will be mounted to the front of the post using these holes. Insert one 5/16" weld nut into the top hole on the inside face of the post. Be sure the threads on the weld nut are clear, it will be captured by the roof support. Install the roof.
- Skip Wmsburg step 20 & 21.
- Install the swing beam. Instructions and hardware are in the 9' Swing Beam Leg Carton (63060-222).

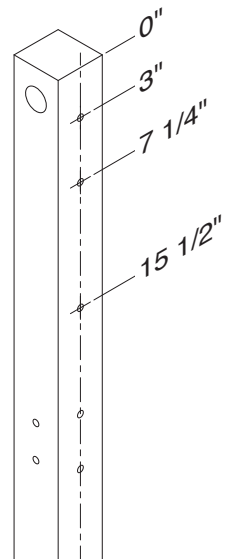

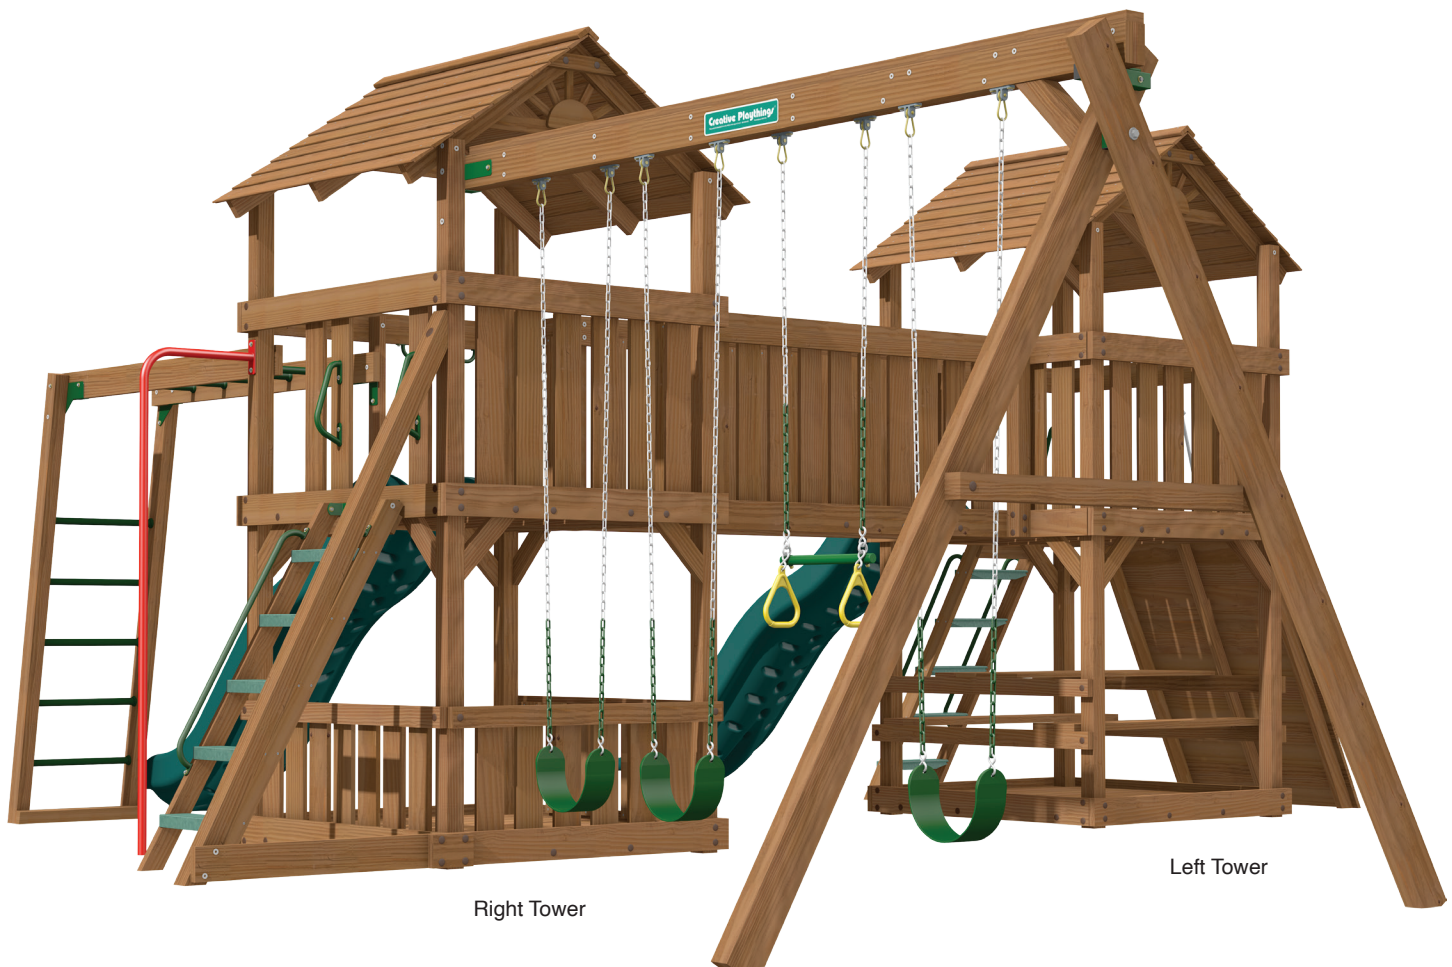

- Using a ladder, install the Dormer (SM963-402) in the position shown on the front page. Ladder access may be obstructed by later installations.
- Assemble the remaining Williamsburg tower.
- Wait to install the Access Ladder, Slide, and Wall Slats until after the whole play set is complete.
- Wmsburg step 8. Before securing the angle braces, move the tower into place 92" from the other tower. Use the bridge rails from SJ951-102 to assure the alignment is exact. Continue assembly making sure the posts are plumb and the towers are level.
- Skip Wmsburg step 20 & 21.
- After installing the second roof, install the bridge between the towers using the instructions from SJ951-102.
- Install the Play Floor (SC908-800Q) on both towers.
- Install the Picnic Table (SD920-800Q) on the left tower.
- Install the Play Walls (SC907-800Q) on the right tower.
- Using a ladder, install the remaining Dormer (SM963-402) in the position shown on the front page. Ladder access may be obstructed by later installations.
- Secure the Monkey Bars (63079-102) to the right tower. Mount one side directly to the corner post as shown above.
- Install the Firemans Pole (AA917-603) on the right tower.
- Mount the Rock Climbing Wall (AH201-102Q) in the position shown.
- Secure each Access Ladder (SH946-102) to a tower in the positions shown above using the method shown in step 20 of the Williamsburg instructions. Fasten two Access Ladder Handles (AG942-400) to each Ladder.
- Install the slide mounts and slides using the method shown in steps 23 and 24 of the Williamsburg instructions.
- Mount a Slide Handle (AG943-400) above each slide.
- Install the wall slats in the positions shown above and on the first page, using the methods from the Williamsburg Instructions. Gaps must be narrower than 3-1/2" or wider than 9" to prevent potential head entrapment.
- Mount the hand grips to the entrance wall slats.
- Double-check all fasteners are secure and all recessed hardware is covered by hole caps.
- Hang the swings.