

Dimensions of assembled package:
21' 11" wide x 16' 8" deep x 11' 6" tall

The components of this gym can be combined with others to create different play sets. This is the best order of assembly to create this specific set.


Read this sheet and all instructions included with the different parts before assembly.

See the Instructions and Owner's Manual included in carton 63062-222 for important safety information.

Cartons for this Play Set:

1	63062-211	Yorktown 1 (Hardware)
1	63062-222	Yorktown 2 (Instructions)
1	63007-421	Lexington Gym 1 (Hardware)
1	63007-422	Lexington Gym 2
1	63062-301	Yorktown Wood Roof (Hardware)
1	SH946-102	Access Ladder 5ft.
1	SM963-402	Dormer Brown (Hdwre & Instr)
1	SM964-402	Gable Fans (Hdwre & Instr)
3	40456-402	End Panel Assembly
2	40459-402	Double Window Panel
2	40460-402	Door & Window Panel (Hdwre & Instr)
1	15166-400	10 ft. Super Wave Slide
1	63058-202	4 Position Swing Beam
1	63076-303	9ft Swing Beam Legs (Hdwre & Instr)
1	50546-777	3 Swings, 1 Trapeze
1	63081-102	Ice Cream Stand (Hdwre & Instr)
2	63073-101	Clubhouse Window Pk (Hdwre & Instr)
1	63079-102	Monkey Bars (Hdwre & Instr)
1	SC910-800Q	Lexington Play Floor (Hdwre & Instr)
1	63064-101	Yorktown Play Walls (Hdwre & Instr)
1	63063-101	Yorktown Play Floor (Hdwre & Instr)
1	AG942-400	Access Ladder Handles (Hdwre & Instr)
1	AG943-400	Slide Handle (Hdwre & Instr)
1	AA917-603	Fireman's Pole (Hdwre & Instr)

- Start by assembling the Yorktown tower. Instructions are in carton 63062-222. Other instructions and hardware are in the cartons noted at left.
- Yorktown step 2. Do not install the Sandbox Center on the front of the tower. Use the Floor Transition from the Yorktown Play Floor (63063-101). See page 2 of the Yorktown Play Floor instructions. Secure the Sandbox backs but wait to install the floors.
- Yorktown step 12. Omit the angle braces. They interfere with the bottom clubhouse panels.
- Yorktown step 14. Omit the stringer flanges. They interfere with the bottom clubhouse panels.
- Yorktown step 19. The 9ft Beam will be mounted in the position pictured above. Parallel to the roof.
- Wait to install the Access Ladder, Slide, and Wall Slats until after the rest of the play set is complete.
- Yorktown step 32. Omit the safety rail.
- Install the 9ft Swing Beam. Instructions are in carton 63076-303.
- Install the Yorktown porch play floor (63063-101) followed by the Lex play floor (SC910-800Q). Install the cleats and stringers for both before installing the deck boards.

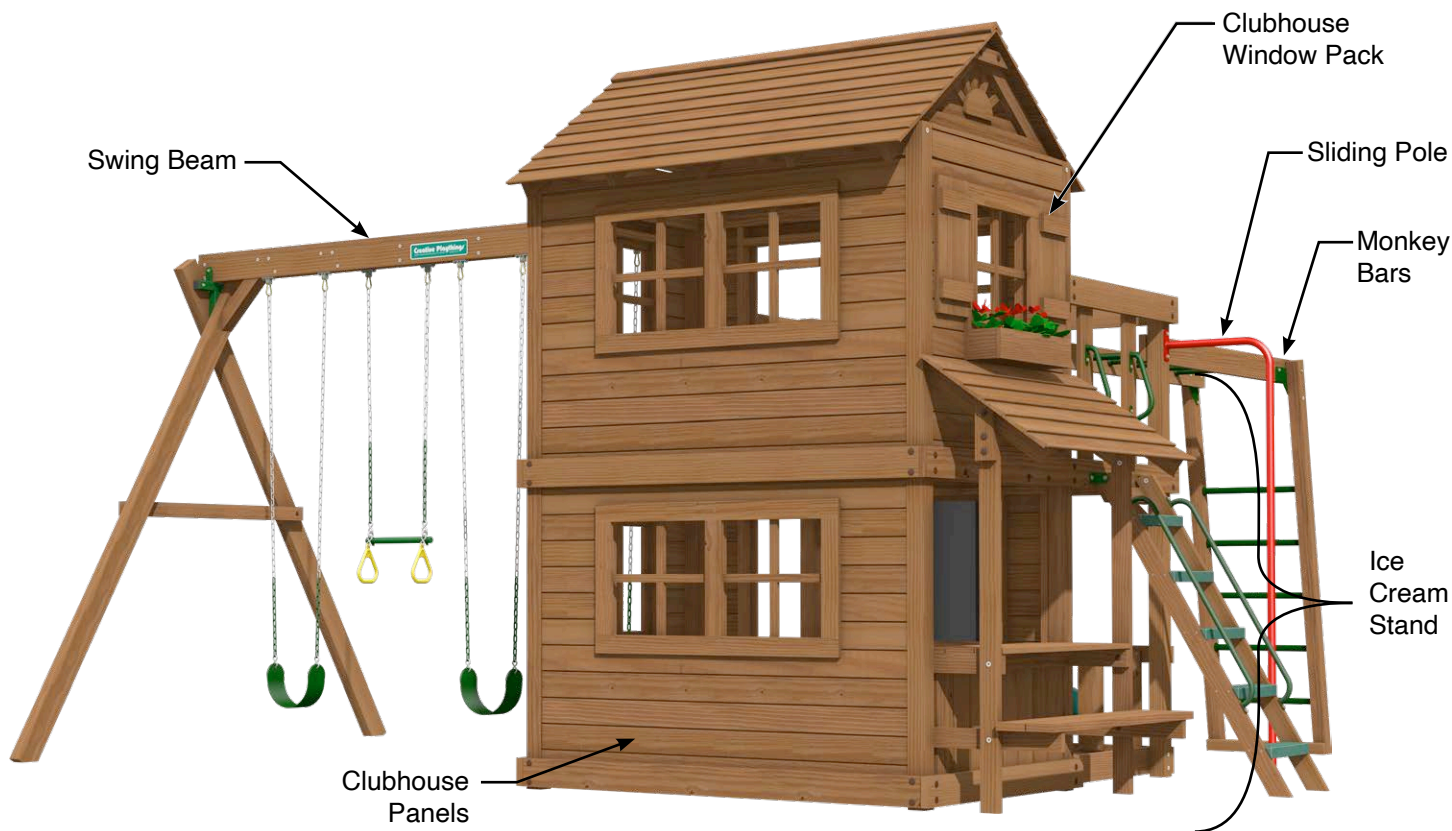

- Install the lower clubhouse panels as shown in the instructions included with the Door & Window Panel (40460-402). Do not install the end window panel where the ice cream stand will mount.
- Install the Yorktown Porch Play Walls (63064-101).
- Install the shutters from one Clubhouse Window Pack (63073-101) on the window panel above where the ice cream stand will mount. Do not install the flower box until after the position of the ice cream stand roof is determined.
- Install the Ice Cream Stand (63081-102) on the end of the tower opposite the swings. Install the flower box above the roof.
- Install the shutters and flower boxes from the remaining Clubhouse Window Pack (63073-101) in the position shown on the first page of this guide.
- Install Monkey Bars (63079-102) on the front of the tower. Mount one side directly to the post.
- Install the Fireman's Pole (AA917-603) in the position shown above.
- Lean the Access Ladder (SH946-102) in the position shown above. Make sure the ladder is clear of the overhang of the ice cream stand roof. Secure the access ladder using the method shown in step 36 of the Yorktown instructions.
- Fasten the Access Ladder Handles (AG942-400) to the Access Ladder.
- Install the slide mount and slide using the method shown in steps 38 and 39 of the Yorktown instructions.
- Mount the Slide Handle (AG943-400) above the Super Wave Slide.
- Install the wall slats in the positions shown on the front page, using the methods from the Ridgefield instructions. Gaps must be narrower than 3-1/2" or wider than 9" to prevent potential head entrapment. Leave a space to access the fireman's pole.
- Mount hand grips to the entrance wall slats.
- Double-check all fasteners are secure and all recessed hardware is covered by hole caps.